
B C2 MO18-0-1 NUMBER

THIS SCHEMATIC IS FURNISHED ONLY FOR TEST AND MAINTENANCE PURPOSES. THE CIRCUITS ARE PROPRIETARY IN NATURE AND SHOULD BE TREATED ACCORDINGLY. COPYRIGHT 1969 BY DIGITAL EQUIPMENT CORPORATION

	TYPICAL PIN ASSIGNMENTS						
PIN	8	8I,8L	DC 08				
Α	+10V	+ 5 V	+ 5 V				
В	-15V	-15V	+5 V				
С	GND	GND.	GND				
Н	LOGIC INPUT	LOGIC INPUT					
U			LOGIC INPUT				
М	READER ENABLE	READER ENABLE	READER ENABLE				
D	LOGIC OUTPUT						
Ε		LOGIC OUTPUT	LOGIC OUTPUT				
К			-15V				
V	-30V OPTIONAL	-30V OPTIONAL	-30V OPTIONAL				

UNLESS OTHERWISE INDICATED : CAPACITORS ARE .OIMFD 100V, 20% DIODES ARE D671 RESISTORS ARE 1/4W, 5% CONNECTOR IS DEC# 1209456

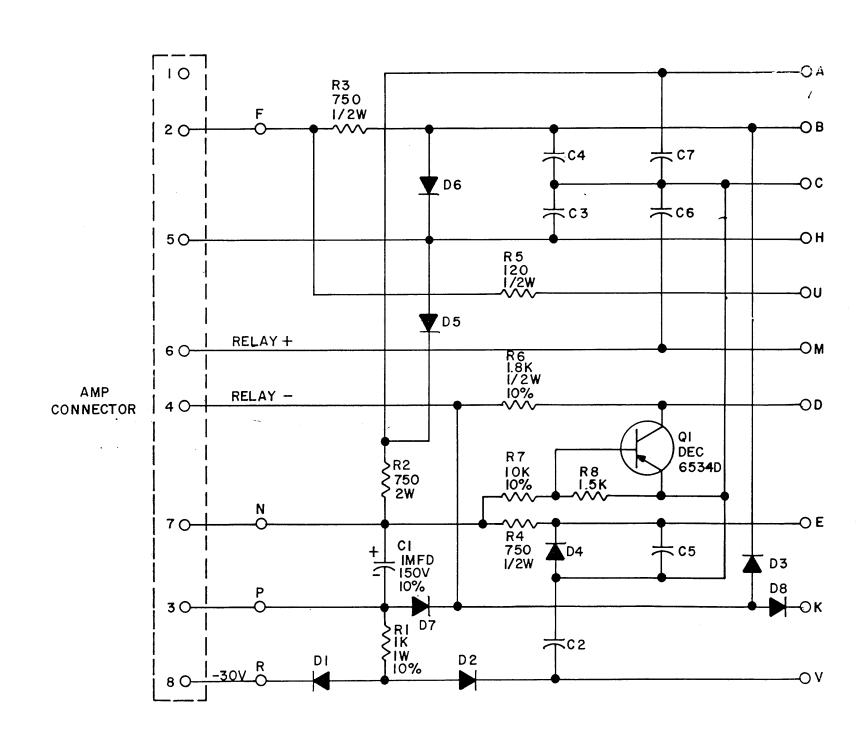

	1		DRN.	DATE
_	RE		R6 lemane	9-2
2	Н	•	CHK'DL 1-4	DATI
2	일		VIII. Materie	10/13
2	일		EMAZI	DAT
ׅ֡֞֞֝֞֞֞֞֝֞֞֝֞֞֜֞֝֓֓֓֓֓֓֓֓֓֓֓֓֓֓֡֝֓֓֓֓֡֝	히		y Clurka:	. 14
:	¥	 	PROD.	DATI
-	六			

DRN.	_	DATE	ii T
CHKID.	emper	9-26-69 DATE	DI
1.6.1	alette	0/13/69	D671
EAMS		DATE	DEC65
31 Ch	Links . "	14 m m	
PROD.		DATE	

TRANS	ISTOR & DIODE	CONVERSION	N CHART	
DEC	EIA	DEC	EIA	
D671	IN3653			
DEC6534D	MPS6534D]EQUI
				CORP
				MAYNARD.

IPMENT PORATION MASSACHUSETTS

5

TELETYPE CONNECTOR WO78

size B	CODE	NUMBER W O 7 8 - O - I					REV.		
PRINTED CIRCUIT REV.			Α						

DIST, 324434,4353

PINK

_